


Circuit Diagram – EasyStart Pro

For Airtronic 2, Hydronic S3 CS

EN

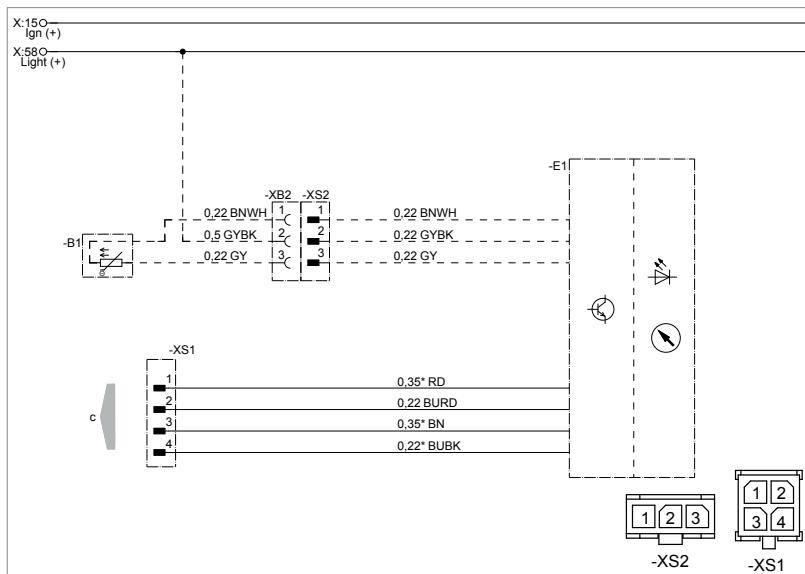

22.1000.35.2210.0A

-B1 Temperature sensor (optional)

-E1 EasyStart Pro

c to the heater

Cable colours

RD	red	GY	grey	BK	black
BU	blue	YE	yellow	GN	green
WH	white	VT	violet	BN	brown

EN
Connector housing pin assignment
-XS1 / -XB1

Pin	Signal	Cable colour
1	Terminal 30	RD
2	CAN High	BU / RD
3	Terminal 31	BN
4	CAN Low	BU / BK

Connector housing pin assignment
-XS2 / -XB2

Pin	Signal	Cable colour
1	Temperature (+)	BN / WH
2	Terminal 58	GY / BK
3	Temperature (-)	GY

Connector housing chamber assignment
(assignment seen from the cable inlet side)

Eberspächer Climate Control
Systems International GmbH
Eberspächerstraße 24
73730 Esslingen
info@eberspaecher.com
www.eberspaecher.com